Rev	Description	Date	By
D	NO WAS NS	03/12/99	JSC

PART NUMBER DESCRIPTION

2MR _ __ – _ _ __ – ___ – 0

- 2 MM RECEPTACLE
- NUMBER OF ROWS
  - 1 – ROW 3 – ROW
  - 2 – ROW 4 – ROW
- POSITIONS PER ROW
  - 02 – 50
- OVERALL LENGTH
  - A – 21.3 [.840]
  - B – 11.6 [.458]
- SOLDER TYPE (TIN–LEAD 63–37)
  - WD – NO–CLEAN FLUX
  - WU – SOLID CORE
  - WO – NO SOLDER
- BODY HEIGHT (.310 MIN)
  - .___ (IN DECIMAL INCHES)
- DESIGN VARIATION

CONTACT FINISH		
DESIGNATION	TAIL AREA	INTERFACE AREA
1	100 MICROINCHES TIN–LEAD ALLOY	GOLD FLASH
3	GOLD FLASH	30 MICROINCHES GOLD
5	100 MICROINCHES TIN–LEAD ALLOY	20 MICROINCHES GOLD
*7	GOLD FLASH	

(*NOTE – RECOMMENDED FOR STACKTHROUGH APPLICATIONS)

NOTES: UNLESS OTHERWISE SPECIFIED

1 INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M–1994

2 FOR OTHER SIZES, FINISHES OR ADDITIONAL DATA CONTACT TEKA'S CUSTOMER SERVICE DEPARTMENT

MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94–V0
CONTACT: PHOSPHOR BRONZE
SOLDER: (SEE PART NUMBER DESCRIPTION)

CONTACT FINISH: (SEE PART NUMBER DESCRIPTION)

PERFORMANCE CHARACTERISTICS – MECHANICAL

INSERTION FORCE: 1.8 OZ PER CONTACT MAX AVG
WITHDRAWAL FORCE: 1 OZ MIN AVG
NORMAL FORCE: 75 GRAMS MIN – EOL
DURABILITY: 100 CYCLES MIN (TYPE 7 FINISH)
OPERATING TEMP: –55°C – 85°C

PERFORMANCE CHARACTERISTICS – ELECTRICAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX INITIAL
CURRENT CAPACITY: 3 AMPS MAX PER CONTACT
DIELECTRIC STRENGTH: 500 VAC
INSULATION RESISTANCE: 10,000 MEGAOHMS MIN

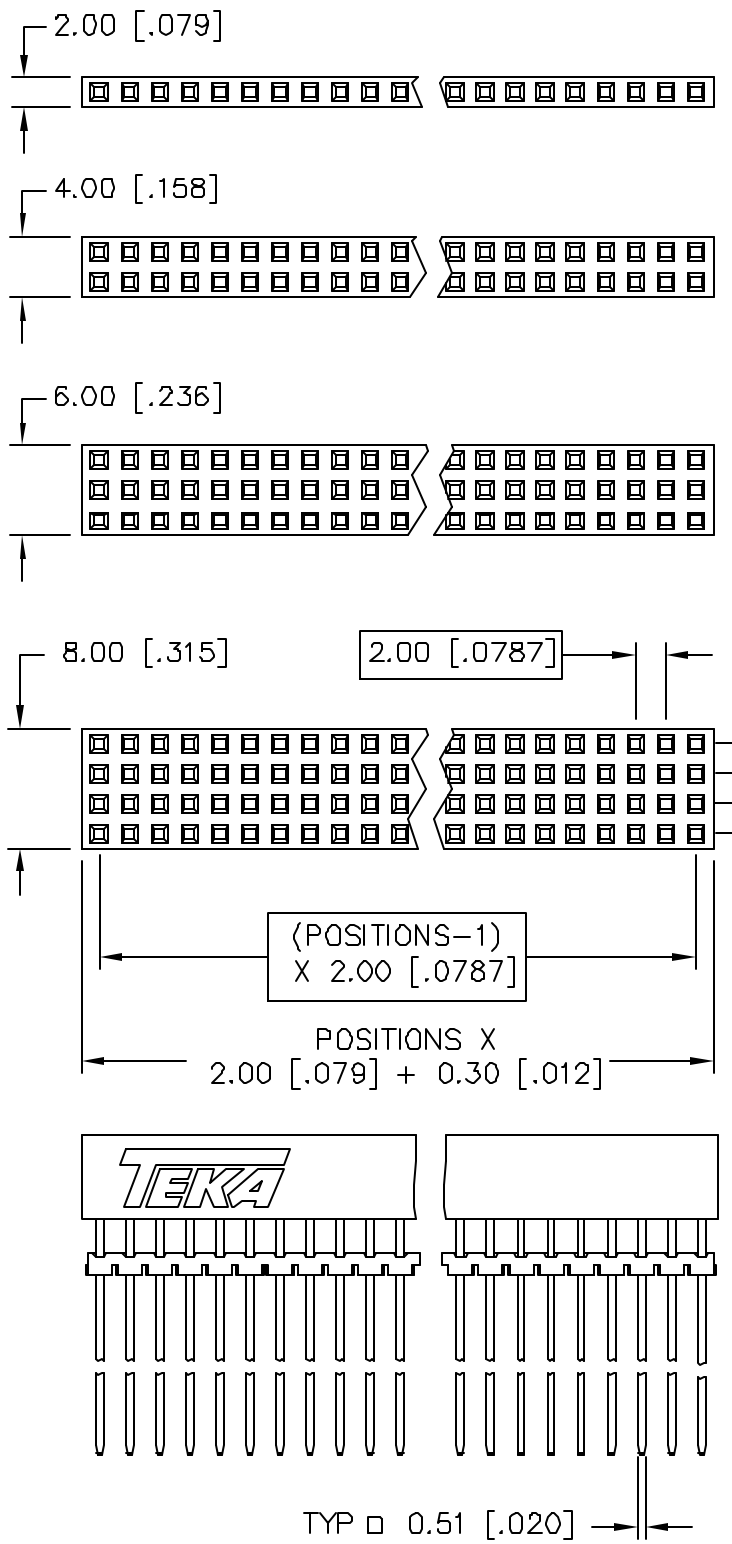

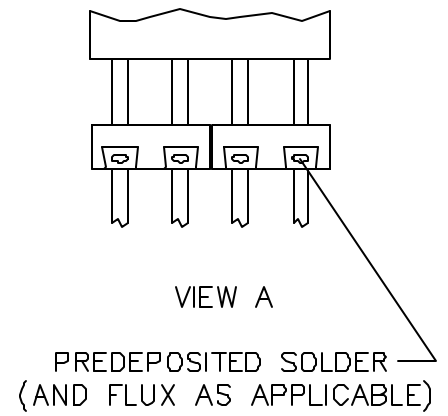

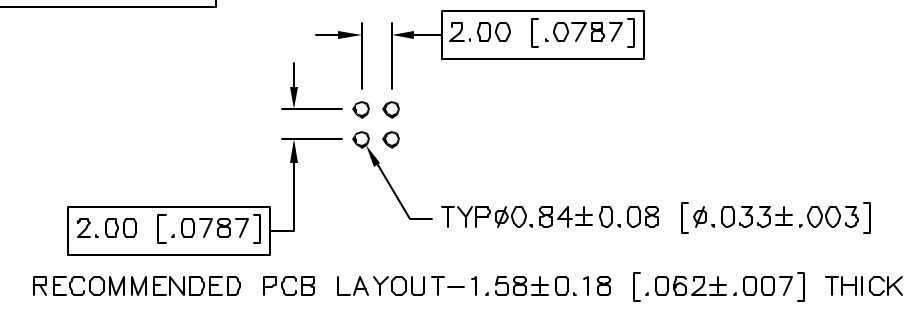

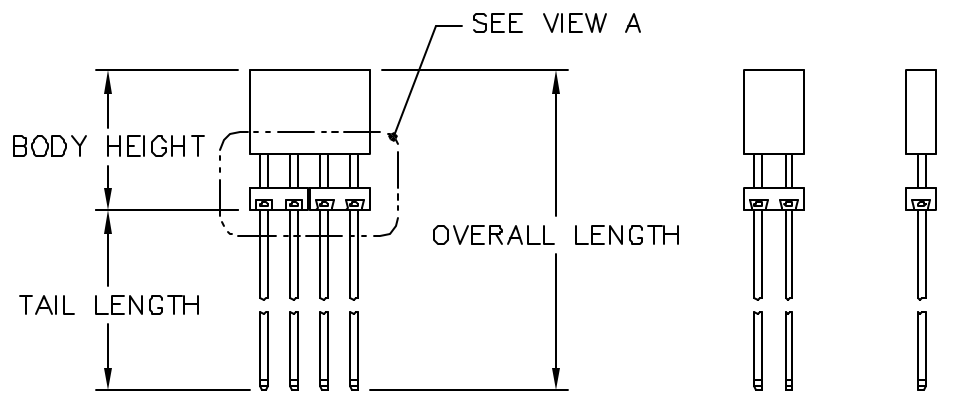

Unless otherwise specified: All dimensions are: mm [Inches] –Tolerances– No of places MM [IN] one ±0.5 ±.02 two ±0.25 ±.010 three ±0.10 ±.004 Angular ±5'	Drawn by: J CACHINA Date: 01/29/03	TEKA AN INTERPLEX INDUSTRIES CO. HTTP://WWW.TEKAIS.COM	100 PIONEER AVE WARWICK, R.I. 02888 TEL:(401) 785-4110 FAX:(401) 781-5730 E-MAIL: sales@tekais.com
	Checked by: JSC Date: 01/31/03	Title: SB 2 MM STACKING RECEPTACLE	Part No: 2MR___–____–___–0
		Ref No: S20305	Scale: 2 : 1 Sheet 1 of 1