

CONTACT POSITION 1

Rev	Description	Date	By
J	ADDED PCB VARIATION TABLE (PER ESR 2004)	03/09/04	VAR

MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL RATED 94-V0
 CONTACTS: PHOSPHOR BRONZE ALLOY
 SOLDER: SEE TABLE II

CONTACT FINISH:

SIGNAL INTERFACE: 30 MICROINCHES MIN GOLD
 GROUND INTERFACE: 150 MICROINCHES MIN TIN-LEAD ALLOY
 SOLDER TAILS: 150 MICROINCHES MIN TIN-LEAD ALLOY
 UNDERPLATE: 50 MICROINCHES MIN NICKEL

PERFORMANCE CHARACTERISTICS - MECHANICAL


DURABILITY: 500 CYCLES MINIMUM
 OPERATING TEMP: -55°C TO +105°C

PERFORMANCE CHARACTERISTICS - ELECTRICAL




CONTACT RESISTANCE: 35 MILLIOHMS MAX INITIAL
 CURRENT CAPACITY: 1 AMP MAX PER CONTACT
 DIELECTRIC STRENGTH: 500 VAC
 INSULATION RESISTANCE: 10,00 MEGAOHMS MIN INITIAL

NOTES: UNLESS OTHERWISE SPECIFIED

- 1 INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M-1994
- 2 THIS PRODUCT CONFORMS TO ALL APPLICABLE FIBER CHANNEL (GBIC) SPECIFICATIONS.
- 3 MAXIMUM PCB THICKNESS THAT CONNECTOR WILL ACCOMMODATE
- 4 CONSULT TEKA'S SALES DEPARTMENT FOR ADDITIONAL SIZE VARIATIONS AND ALTERNATE CONFIGURATIONS
- 5 FOR MATING CONNECTOR-SEE TEKA PART NUMBER GR210-00-40D (SELF SOLDERING R/A RECEPTACLE)

Drawn by: J CACHINA	Date: 2/15/99	 AN INTERPLEX INDUSTRIES CO. 100 PIONEER AVE WARWICK, R.I. 02888 TEL: (401) 785-4110 FAX: (401) 781-5730 E-MAIL: sales@teka.com
Checked by: JSC	Date: 10/27/99	
Title: SELF SOLDERING - S/M SCA - 2 PLUG		Part No: GP210-0_-40_ (SEE TABLES)
Ref No: S99002	Scale: 2:1	Sheet 1 of 2

Rev	Description	Date	By
J	ALL REVISIONS - SEE SHEET 1	03/09/98	VAR

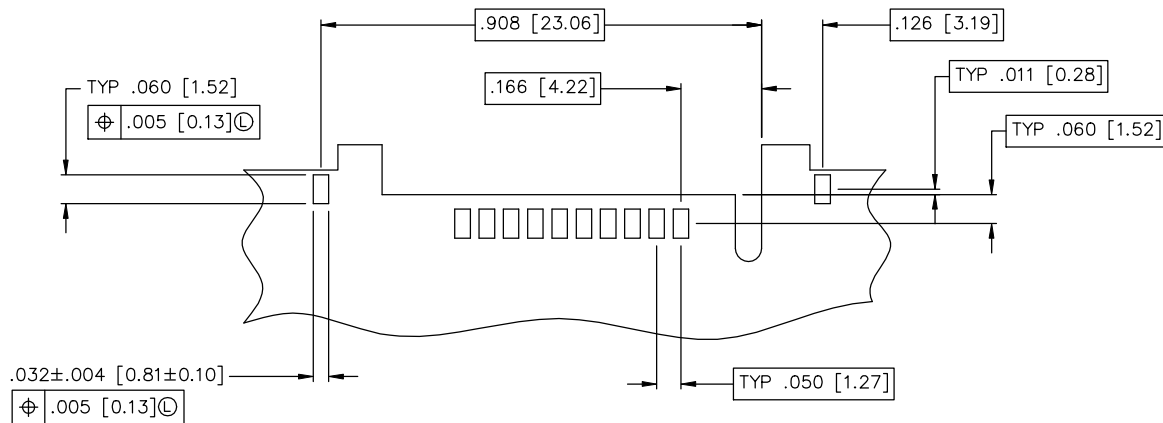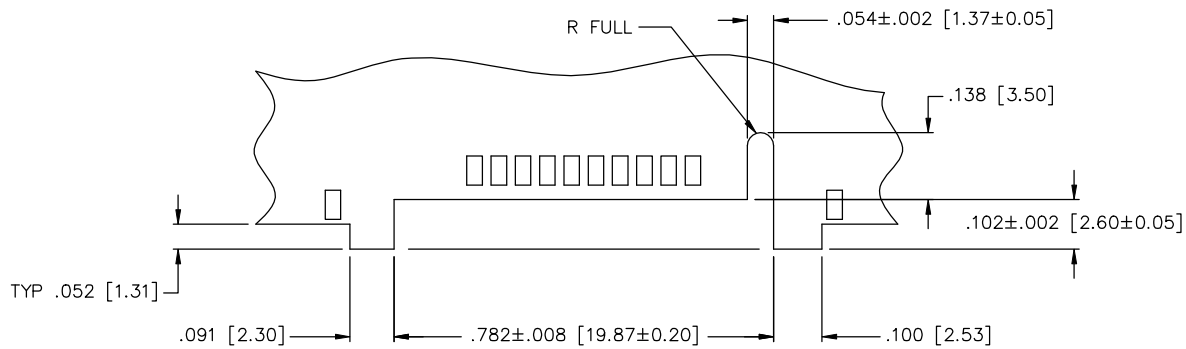


RECOMMENDED HOST CARD LAYOUT

PART NUMBER DESCRIPTION

GP210-0-40
 PCB THICKNESS SEE TABLE I
 SOLDER DESCRIPTION SEE TABLE II

TABLE I - PCB THICKNESS	
PART NUMBER	PCB THICKNESS
GP210-00-40_	.062 [1.57]
GP210-01-40_	.051 [1.30]

TABLE II - SOLDER DESIGNATION	
PART NUMBER	SOLDER DESIGNATION
GP210-___-40D	COMPOSITION: 63-37 TIN-LEAD W/ FLUX CORE
GP210-___-40U	SOLID CORE (NO FLUX) COMPOSITION: 63-37 TIN-LEAD

Drawn by: J CACHINA	Date: 02/15/99	 AN INTERPLEX INDUSTRIES CO. HTTP://WWW.TEKAS.COM	100 PIONEER AVE WARWICK, R.I. 02888 TEL:(401) 785-4110 FAX:(401) 781-5730 E-MAIL: sales@tekas.com
Checked by: JSC	Date: 10/27/99		Part No: GP210-0_-40_ (SEE TABLES)
Title: SELF SOLDERING - S/M SCA -2 PLUG		Ref No: S99002	Scale: 4:1 Sheet 2 of 2